

AFRL-PR-WP-TP-2006-226

**SUBSTRATE PLANARIZATION
STUDIES ON IBAD SUBSTRATES**

**Srinivas Sathiraju, John P. Murphy, Julianna M. Evans,
Angela L. Campbell, Lyle B. Brunke, and Paul N. Barnes**



MARCH 2004

Approved for public release; distribution is unlimited.

STINFO COPY

© 2004 Materials Research Society

This work is copyrighted. One or more of the authors is a U.S. Government employee working within the scope of their Government job; therefore, the U.S. Government is joint owner of the work and has the right to copy, distribute, and use the work. All other rights are reserved by the copyright owner.

**PROPULSION DIRECTORATE
AIR FORCE MATERIEL COMMAND
AIR FORCE RESEARCH LABORATORY
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7251**

REPORT DOCUMENTATION PAGE				<i>Form Approved</i> OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YY) March 2004		2. REPORT TYPE Conference Paper Postprint		3. DATES COVERED (From - To) 03/10/2003 – 03/10/2004	
4. TITLE AND SUBTITLE SUBSTRATE PLANARIZATION STUDIES ON IBAD SUBSTRATES				5a. CONTRACT NUMBER In-house	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 61102F/62203F	
6. AUTHOR(S) Paul Barnes and Julianna M. Evans (AFRL/PRPG) Srinivas Sathiraju (NRC) John P. Murphy (UDRI) Angela L. Campbell (AFRL/MLPJE) Lyle Brunke (UES Inc.)				5d. PROJECT NUMBER 3145	
				5e. TASK NUMBER 32	
				5f. WORK UNIT NUMBER 314532Z9	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Power Generation Branch (AFRL/PRPG) Power Division Propulsion Directorate Air Force Research Laboratory, Air Force Materiel Command Wright-Patterson Air Force Base, OH 45433-7251 ----- NRC				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-PR-WP-TP-2006-226	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Propulsion Directorate Air Force Research Laboratory Air Force Materiel Command Wright-Patterson AFB, OH 45433-7251				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL-PR-WP	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-PR-WP-TP-2006-226	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES Conference paper postprint for the 2003 Fall Materials Research Society Conference Proceedings. © 2004 Materials Research Society. This work is copyrighted. One or more of the authors is a U.S. Government employee working within the scope of their Government job; therefore, the U.S. Government is joint owner of the work and has the right to copy, distribute, and use the work. All other rights are reserved by the copyright owner. PAO Case Number: ASC 03-3098, 26 Nov 2003.					
14. ABSTRACT To achieve high critical currents in 2nd generation superconductors deposited on metallic substrates, substrate average roughness and texture of the buffer layer are key factors. This study is about planarization of IBAD substrates using an inductively coupled RF discharge operating at 13.56MHz. A pancake coil antenna was used to construct the inductively coupled discharge system. Exposure to an Ar plasma for varying Ar pressures and time 15 min to 1 hr created linearized substrates. Surface roughness was measured using AFM as well as surface profilometer. Unpolished Inconel substrates have been studied under varying RF plasma conditions, such as pressure, RF power, and etch time to determine effects on substrate roughness. AFM and KLA- TENCOR SP measured average surface roughness (Ra) of the planarized samples. The best Ra found on plasma etched substrate is 4nm under 240 mTorr pressure and 100 W RF power and 30 min time from AFM analysis. The Ra values for Inconel substrates vary between 35-51 nm under varying conditions. Our initial results suggest that there is a decreasing tendency in Ra with the increase of Ar pressure.					
15. SUBJECT TERMS substrate, planarization, IBAD, YBCO, surface roughness					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 10	19a. NAME OF RESPONSIBLE PERSON (Monitor) Paul N. Barnes 19b. TELEPHONE NUMBER (Include Area Code) N/A
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			

Substrate Planarization Studies on IBAD Substrates

Srinivas Sathiraju², John P Murphy¹, Julianna M. Evans, Angela L. Campbell³,
Lyle B. Brunke⁴, Paul N. Barnes.

¹UDRI, ²NRC, ³MLPJE, ⁴UES Inc.

2645 Fifth Street, Bldg 450, Propulsion Research and Power Generation Branch,
Air Force Research Laboratory, Wright-Patterson AFB, OH 45433

ABSTRACT

To achieve high critical currents in second generation superconductors deposited on metallic substrates, substrate average roughness and texture of the buffer layer are key factors. This study is about Planarization of ion beam assisted deposition (IBAD) substrates using an inductively coupled radio frequency (RF) discharge operating at 13.56MHz. The inductively coupled discharge system was constructed using a pancake coil antenna. Linearized substrates were created by exposure to an Ar plasma for varying Ar pressures (8 mTorr – 1 Torr) and time 15 minutes to 1hr. Surface roughness was measured using atomic force microscopy (AFM) as well surface profilometer. Unpolished Inconel substrates have been studied under varying RF plasma conditions, such as pressure (8 mTorr to 1 Torr), RF power (50 Watts to 200watts) and etch time (15 to 60 minutes) to determine the effects on substrate roughness. Average surface roughness (*Ra*) of the planarized samples was measured using AFM and KLA-TENCOR surface profilometer (SP). The best *Ra* observed on plasma etched substrate is 4 nm under 240 mTorr pressure and 100 watts RF power and 30 minutes time from AFM analysis. The *Ra* values for Inconel substrates vary between 35- 51 nm under varying conditions. Our initial results suggest that there is a decreasing tendency in *Ra* with the increase of Ar pressure.

INTRODUCTION

For the deposition of oxide buffer layers using ion beam assisted deposition (IBAD), the substrate smoothness is important for obtaining good texture of the buffer layers. However, there are no systematic studies reported on the substrate planarization. So in this paper we report a systematic investigation of substrate planarization using RF plasma under varying plasma conditions.

EXPERIMENTAL

An inductively coupled discharge system was constructed using a pancake coil antenna. Cross sectional view of the experimental set up is shown in Figure1. The chamber is pumped using a Turbo pump prior to the etching. Plasma was created by ionizing ultra pure Ar gas at 13.56 MHz RF power (max. 200 Wats) in the chamber to treat the substrates. Linearized substrates were created by exposure to the plasma at different Ar

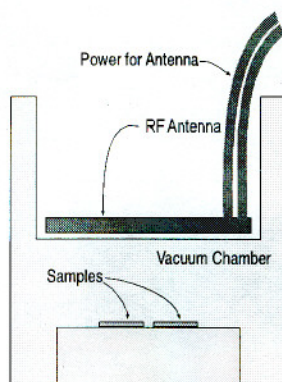


Figure 1 Cross sectional view of the experimental set up

pressures (8 mTorr – 1 Torr) and time (15 minutes to 1hr). We have also investigated the effect of magnetron plasma on the planarization at very low Ar pressures. Substrates were placed on the top of a circular magnetron. *Ra* of the sample, before plasma treatment and after plasma treatment determined using AFM as well as a SP.

RESULTS AND DISCUSSION

AFM surface analytical studies (10 μ m x 10 μ m area over 30 positions) suggest that *Ra* is not affected from 30 to 120 mTorr pressure. However, a sudden increase in the *Ra* has been observed at 240 mTorr Ar pressure. The best fit for this graph is a Polynomial fit as shown in the Figure 2. The surface morphology of a planarized substrate at 30mTorr Ar pressure for 30 minutes with 100W RF power is shown in Figure 3. However, the *Ra* data (50 μ m x 50 μ m) obtained from SP analysis shown in Figure 4 suggests that the trends are towards lower surface roughness with the increase of Ar pressure. Figure 5 suggests that there is no significant effect of RF power with time on the average *Ra*. However, a decreasing tendency in *Ra* with the increase in Ar pressure has been observed. More studies are in progress to explain the effects of Ar pressure or RF power or time of planarization on the substrate average roughness.

Table 1. Summary of AFM analysis for certain conditions of substrate planarization

Pressure mTorr	Power Watts	Time in mts	<i>Ra</i> (nm)	Mean	Median	Std Deviation	Variance	Best <i>Ra</i> (nm)
*0	*	*	9.1	8.7	8.3	2.71	7.4	5.9
30	100	30	9.6	8.9	8	3.41	11.7	4.1
60	100	30	8.1	7.5	6.8	2.95	8.7	4.4
120	100	30	8.6	8.2	8.04	2.6	6.76	4.3
240	100	30	15.2	15.2	8.6	10.1	101	5.1

0* Unpolished substrate

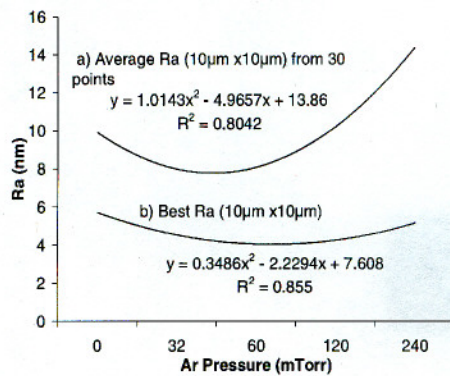


Figure 2

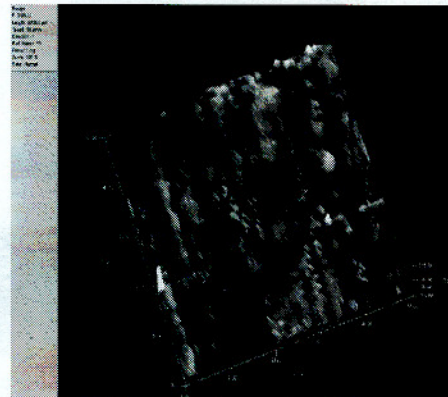


Figure 3

Figure 2. Affect of Ar Pressure on Ra of planarized Inconel (AFM analysis)
 Figure 3. Typical surface morphology of the planarized Inconel substrate (SP micrograph)

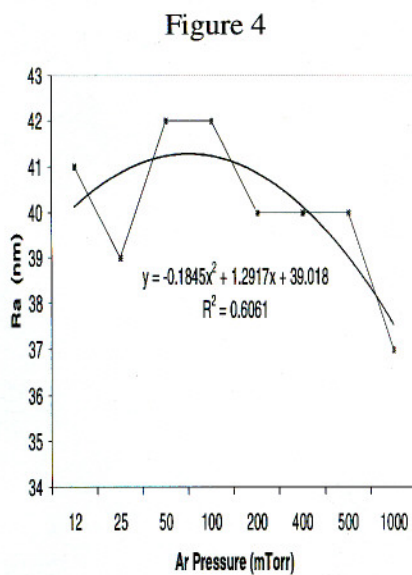


Figure 4

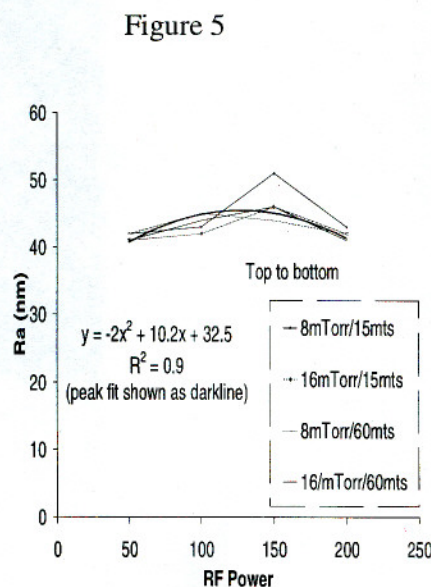


Figure 5

Figure 4. Affect of Ar partial pressure on Ra (from SP data analysis).
 Figure 5. Affect of RF power on Ra (from SP data analysis)

ACKNOWLEDGEMENTS

Sathiraju acknowledges National Research Council (NRC), National Academy of Sciences (NAS), Air Force Office of Scientific Research (AFOSR), and the Propulsion Directorate of Air Force Research Laboratory (AFRL) for the award of SRA fellowship and research support.